




ETHERNET EXTENSION EXPERTS

Enable-IT 821QW+ Outdoor 150W Ultra PoE Extender Quickstart Guide

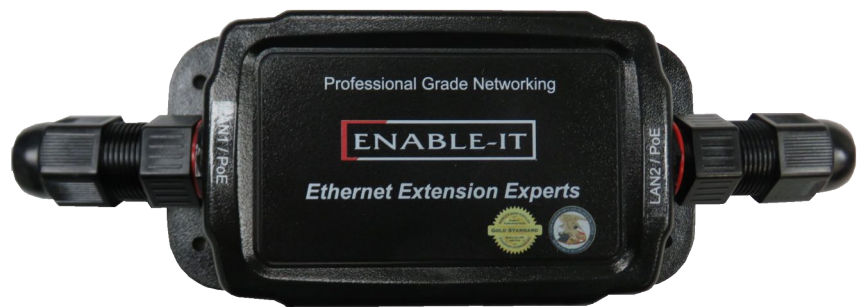


Professional Grade Networking



INSTALLING THE 821QW+ OUTDOOR 150W ULTRA PoE EXTENDER

The Enable-IT 821QW+ Outdoor 150W Ultra PoE Extenders have a distance reach of up to 3,280ft (1km) over any 1-pair wiring (Telephone, Coax, or Category rated) between the 821QW+ units.

You can add additional 328ft (100m) onto the end of each 821QW+ LAN output ports for a total distance of 3,936ft (1.2km) from device extension to device extension.

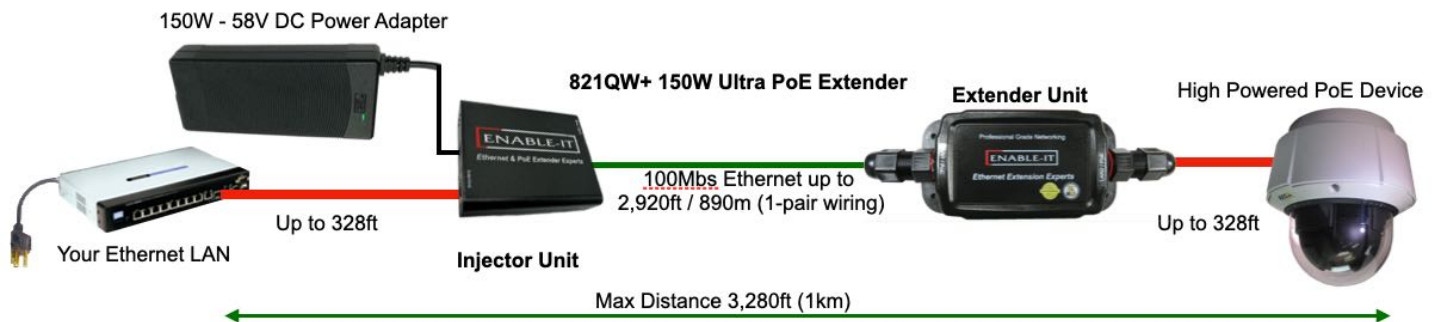

We highly recommend that you perform a quick out of the box test to ensure the working order of your Enable-IT 821QW+ Outdoor PoE Extender units prior to installing. This will also serve to familiarize you with how easy the process should be. Follow the steps below to perform the Out Of the Box Test.

Step 1 - Attach the 150W DC Power Adapter to the 821QW+ Injector unit and to your AC outlet. The Power LED

will indicate the unit is receiving power as well as the 150W 56V DC Power Adapter LED.

Step 2 - Connect the 821QW+ units together using one of the Ethernet LAN Patch cords provided – attach to the Interlink port on each 821QW+ unit as shown by the green line connecting the ports in the diagram above. The Power LED indicator on the 821QW+ PoE Extender unit and LAN ports

will

provide visual operational status of the 821QW+ units.

Step 3 - Attach and test and to confirm your LAN Equipment works through the 821QW+ extension, connect your Ethernet LAN to the 821QW+ Injector unit LAN port and the remote device to the 821QW+ Extender LAN port and test connectivity.


This confirms basic proper operation of the units.

Performing the On-Site Installation

After removing the Enable-IT 821QW+ Outdoor 150W Ultra PoE Extender Kit from the box, and performing the Out Of The Box Testing (OOTBT), all that remains to install the unit on-site is to mount the unit, build the interconnect wiring, add voice lines if needed, and attach the LAN device cabling with the provided Ethernet Patch cords.

Building the 821QW+ Interlink Wiring

The 821QW+ Interlink port carries this 1-pair signaling and power over 1-pair Wiring. For all wiring you will need to crimp a RJ-45 male head to each end of the contiguous wire run straight through. We recommend using CAT rated cable as it is optimized for high throughput frequencies isolated from cross-talk noise. Insert the completed RJ-45 ends into the 821QW+ Interlink port on each 821QW+ unit.

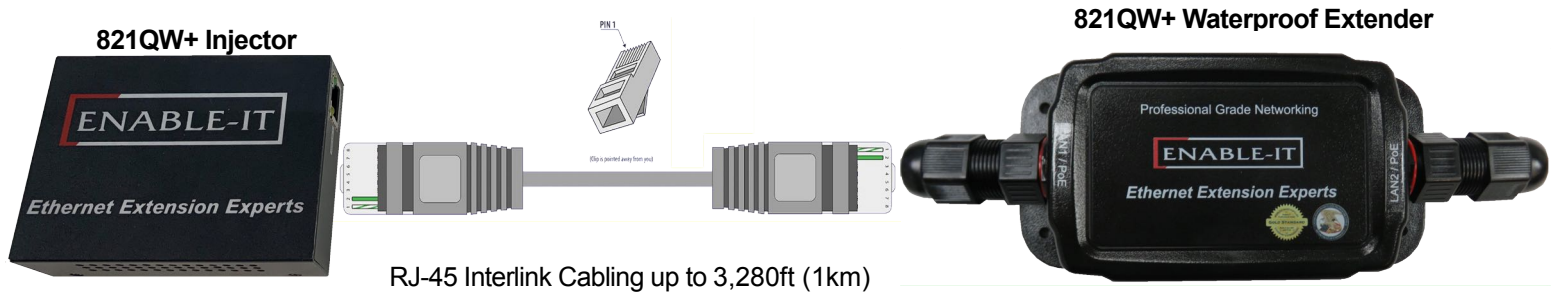

Cabling Devices to The Enable-IT 821QW+ Extended Ethernet Kit

Attach your remote PoE device to the 821QW+ Extender unit LAN port with Ethernet patch cord provided. Attach your local LAN to the 821QW+ Injector unit Data In port with Ethernet patch cord provided. Attach the 56V -150W DC Power Adapter to the 821QW+ Injector unit.

Attach your local Interlink cabling end to the 821QW+ Injector unit Interlink port – Then do the same for the remote end and plug into the 821QW+ Extender unit Interlink port. The Interlink side Green Sync LED should be solid, indicating it sees the remote partner. There is no sync delay! Your equipment should now be powered up and functioning.

The LED indicators will provide visual operational status of the 821QW+ Outdoor PoE Extender units.

Troubleshooting

First examine the backbone wiring pair and make sure you have solid connections. The LRP Interlink Sync LED will be lit solid Green on each 821QW+ unit. The units sync instantly and have no delay. If either fail to light up.... Then follow the steps below:

- 1) Make sure your wiring is straight through and not connected to any Telco punch down blocks; If so remove from the block and use Telco butt clips to bridge wire.
- 2) Check for a firm connection of the RJ-45 connections in each 821QW+ unit, and power is applied to the 821QW+ Injector unit. The 821QW+ Extender unit should be receiving power.
- 3) **You can easily isolate any issue by performing an Out Of The Box Test (OOTBT). This test will confirm the correct working order of your Enable-IT 821QW+ Outdoor PoE Extender Kit. This will point to a possible issue with your long distance LRP Interlink wiring being affected by possible outside interference.**

TECHNICAL SUPPORT

Enable-IT, Inc.'s Customer Care Team support is available directly to customers and distributors. All support requests are processed through the online support portal. This allows us to provide assigned support ticket numbers in order to bring closure to any technical issues.

Online Technical Services

The Enable-IT Support [Portal](https://support.enableit.com) is available 24/7 to open a ticket or check the status of one. Please use this support website as your first source for help as it contains an on-line knowledge base of articles, documentation, FAQ's and other problem-solving resources. This web-based support resource provides the quickest solution to the most common technical support issues.

Returning Products for Warranty Repair

Enable-IT warrants to the original purchaser of this described Product ("you" or the "End User") that, for the limited lifetime period commencing on the date the Product was purchased (the "Warranty Period"), the Product will be substantially free from defects in materials and workmanship under normal use and conditions. Lifetime Warranty details here: <https://warranty.enableit.com>

This warranty does not apply to Products, which are resold as used, repaired or reconditioned. **Electrical or water damage is not covered under this warranty, extended warranties or Advanced Replacement Program (AREP).**

In order to obtain an authorized RMA approval, the End User must complete the required information online located at <https://support.enableit.com>. If you have questions or difficulty completing this information you may contact the Customer Care Team at 888-309-0910 between the hours of 7:00 a.m. and 4:00 p.m. Pacific Time(PST).

Returning Products for Refund

Enable-IT, Inc. offers a generous 45-Day refund on a single Ethernet Extender Kit only, and is subject to a 20% Restocking Fee. Shipments without a valid or authorized RMA number, or sent to our corporate Las Vegas address, can be refused and / or billed for additional shipping.

CONTACT US

Sales and Customer Care:

Toll Free US and Canada

888 309-0910

Other International

+1 702 924-0402

E Mail

sales@enableit.com
support@enableit.com

RMA Support:

<https://support.enableit.com>